

PREMIUM EFFICIENCY Electronically controlled exhaust fan motors


See Video @ https://www.youtube.com/watch?v=QZ7qq18_i3U



EC801, EC847, *EC537




EC911

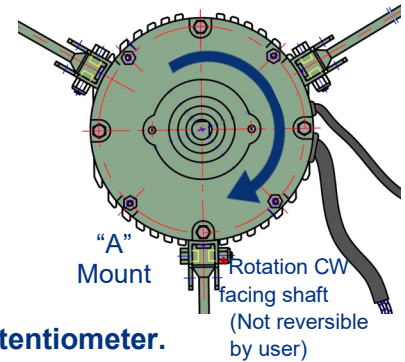

• Speed controlled by 0-10VDC from fan control, or manual speed potentiometer.

HP	RPM	FRAME	IND#	THERMAL OVERLOAD	VOLTAGE	230V FLA	WGT LB	MOUNT	SHAFT"	FL EFF %	"C" DIM.	LIST		
.50	450-1625	48	EC801	AUTO	115-230	2.5	11.5	M	.5 X 2.5	85.1	11.5	363		
.50	450-1625	48	EC986	AUTO	115-230	2.5	11.5	E	.5 X 2.5	85.1	11.5	363		
.50	450-1625	48	EC911	AUTO	115-230	2.5	11.5	A	.5 X 2.5	85.1	10.8	414		
.75	400-1200	48	EC847	AUTO	115/208-230	4.8	16.0	M	2.5 X .625	84.5	11.5	485		
1.0	300-900	48	*EC537	AUTO	115-230	5.8	21.0	M	2.375X .625	85.0	11.4	543		
Manual Speed Control			EC-20K	Supplied with 8 ft. cable for 0-10 VDC										23

* EC537 rotation is opposite. (CCW facing shaft)

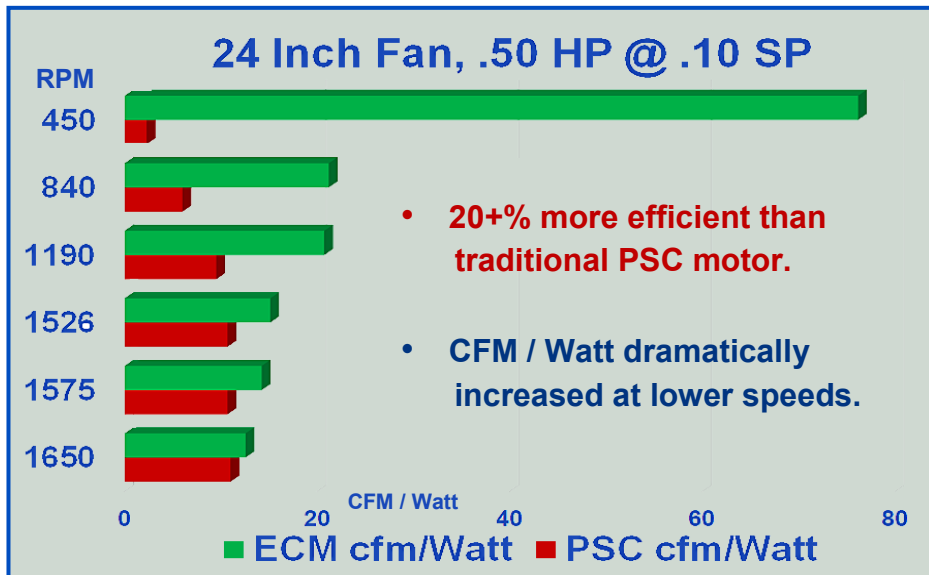

Voltage change switch has removable rubber cover. (Switch factory set for 230V.)

EC-20K Manual Speed Control



- All models have locked bearing and oil seal.
- Suitable for vertical mount.
- Automatic thermal protection UL / EPL
- Large heat sink for efficient heat dissipation.
- IP55 Ingress protection
- Circuit board silicone potted

